


KTB2/3 Series

Modular Terminal Blocks




KTB2

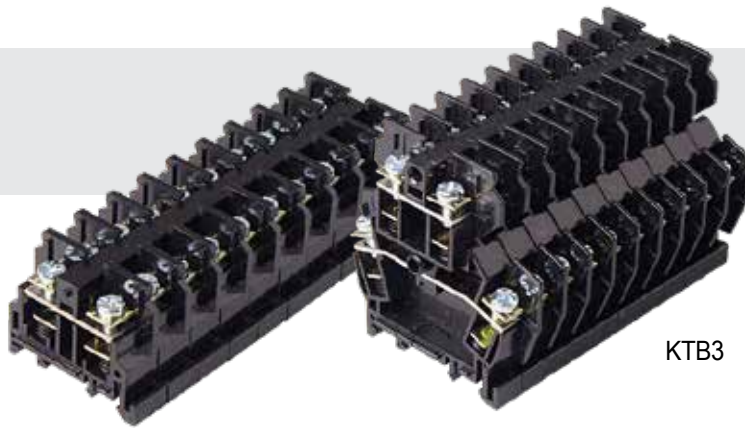

KTB3

Dimensions

unit:mm

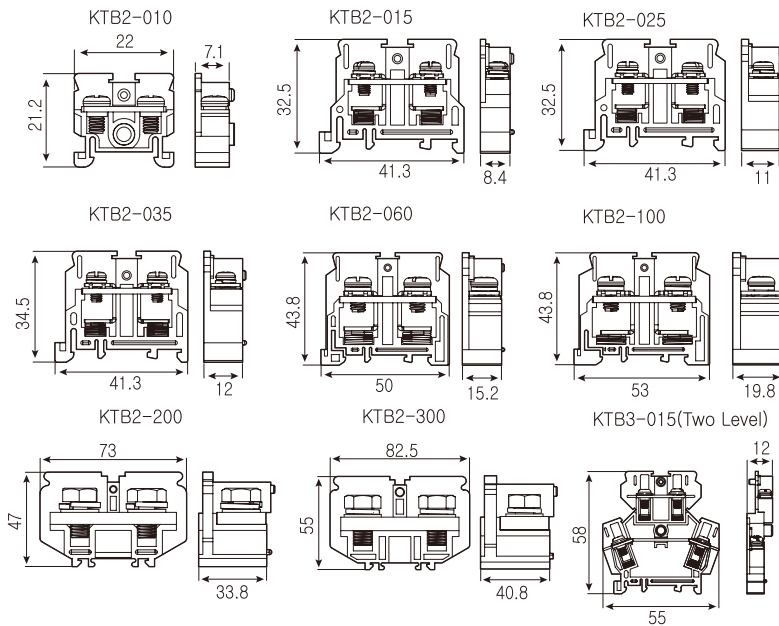

Ordering Information

KTB ① - ②

① Description	2	Single level		
	3*	Double level		
② Rated Current	010	10A	015*	15A
	025	25A	035	35A
	060	60A	100	100A
	200	200A	300	300A

* KTB3 double level terminal block has only 15A model.

General Specification

Rated Voltage	Max. 600VAC
Insulation Resistance	Min. 100MΩ
Dielectric Strength	2,500VAC/Min.

Accessories

Jumper



KTB2-S2506

KTB2-015	KTB2-S1512K
KTB2-025	KTB2-S2506K
KTB2-035	KTB2-S3508K

Stoppers



KTB2-Sta

15mm	Sta
35mm	Stb
35mm (plastic)	Stc



KTB2-Stb



KTB2-Stc

Separators




KTB2-A10 KTB2-A35 KTB3-A15

KTB2-010	KTB2-A10	KTB2-015	KTB2-A15
KTB2-025	KTB2-A25	KTB2-035	KTB2-A35
KTB2-060	KTB2-A60	KTB2-100	KTB2-A100
KTB2-200	KTB2-A200	KTB2-300	KTB2-A300
KTB3-015	KTB3-A15		

Connection Terminal Specification

unit:mm



Model	KTB2-010	KTB2-015	KTB2-025	KTB2-035	KTB2-060	KTB2-100	KTB2-200	KTB2-300	KTB3-015
Terminal Bolt	M3.0	M3.5	M4.0		M6.0		M10.0	M12.0	M3.5
W	6.6	6.8	8.7	9.6	12.4	16.5	24.5	29	6.8
L	20.0		27.0		30.0	45.5		55.5	20.0
l	8.0		14.0		14.5	20.5		25.5	8.0
d	Ø3.1	Ø3.6	Ø4.1		Ø6.1		Ø10.1	Ø12.1	Ø3.6