


SAC IP67



Black
 Gray

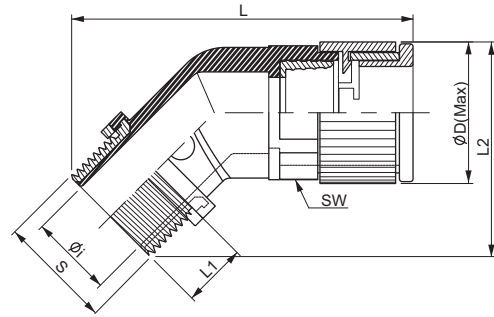

M Pg

- Material: High Quality Polyamide6+Brass Nickel plated
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Tramway Vehicle Construction etc.

Pg Thread (DIN 40430)

(dimensions in mm)

Order No.											
Black	Gray	Thread	For tube size	S	L ₁	L ₂	L	Ø _i	Ø _D	SW	
SAC-P09B	SAC-P09G	Pg09	10	15.2	13	34	62	8	25	19.8	
SAC-P11B	SAC-P11G	Pg11	12	18.6	13	39	68	9	25	22.7	
SAC-P136B	SAC-P136G	Pg13.5	16	20.4	13	45	68	12	30	28	
SAC-P16B	SAC-P16G	Pg16	16	22.5	13	46	68	12	30	28	
SAC-P21B	SAC-P21G	Pg21	22	28.3	15	58	82	18	41	37.5	
SAC-P29B	SAC-P29G	Pg29	28	37	15	63	92	25	47	43	
SAC-P36B	SAC-P36G	Pg36	36	47	20	77	104	31	56	52.2	
SAC-P48B	SAC-P48G	Pg48	48	59.3	20	92	125	47	68	64.1	

Metric Thread (EN 60423)

SAC-M10B	SAC-M10G	M12 X 1.5	10	12	13	33	58	6	25	19.8	
SAC-M12B	SAC-M12G	M16 X 1.5	12	16	13	38	62	9	25	22.7	
SAC-M16B	SAC-M16G	M20 X 1.5	16	20	13	45	67	12	30	28	
SAC-M22B	SAC-M22G	M25 X 1.5	22	25	15	56	80	16	41	37.5	
SAC-M28B	SAC-M28G	M32 X 1.5	28	32	15	61	92	23	47	43	
SAC-M36B	SAC-M36G	M40 X 1.5	36	40	20	74	104	31	56	52.2	
SAC-M48B	SAC-M48G	M50 X 1.5	48	50	20	89	125	40	68	64.1	