


SICC IP68



- Black
- Gray

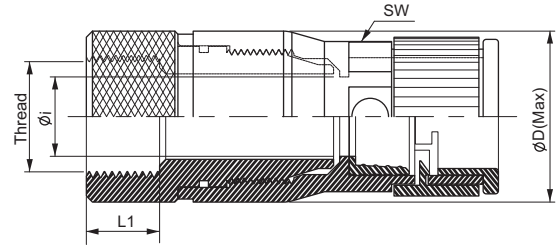

UNEF

- Material: High Quality Polyamide6+Brass Nickel plated
- Protective: IP 68 (EN 60529)
- Temperature Range: -40°C to +105°C
- Short Term: up to +150°C
- Self-Extinguishing: UL94-HB
- Free of Halogen Phosphorous and cadmium
- Color: Black & Gray
- Application: Tramway Vehicle Construction etc.

UNEF Thread (ASME B1.1)

(dimensions in mm)

Order No.									
Black	Gray	Thread	Fortube size	Sheel Size	L ₁	Ø _i	Ø _D	SW	
SICC-U1010B	SICC-U1010G	1/2-28UNEF	10	8S, 10S	10	9	25	19.8	
SICC-U1210B	SICC-U1210G	5/8-24UNEF	10	10SL, 12S	10	9	25	19.8	
SICC-U1410B	SICC-U1410G	3/4-20UNEF	10	14, 14S	10	9	25	19.8	
SICC-U1212B	SICC-U1212G	5/8-24UNEF	12	10SL, 12S	10	11	25	22.7	
SICC-U1412B	SICC-U1412G	3/4-20UNEF	12	14, 14S	10	11	25	22.7	
SICC-U1612B	SICC-U1612G	7/8-20UNEF	12	16, 16S	10	11	25	22.7	
SICC-U1812B	SICC-U1812G	1-20UNEF	12	18	10	11	25	22.7	
SICC-U1616B	SICC-U1616G	7/8-20UNEF	16	16, 16S	10	13	30	28	
SICC-U1816B	SICC-U1816G	1-20UNEF	16	18	10	13	30	28	
SICC-U2016B	SICC-U2016G	1 3/16-18UNEF	16	20, 22	10	13	30	28	
SICC-U2316B	SICC-U2316G	1 3/8-18UNEF	16	20, 22	10	13	30	28	
SICC-U2816B	SICC-U2816G	1 7/16-18UNEF	16	24, 28	10	13	30	28	
SICC-U2222B	SICC-U2222G	1 3/16-18UNEF	22	20, 22	10	18	41	37.5	
SICC-U2822B	SICC-U2822G	1 7/16-18UNEF	22	24, 28	10	18	41	37.5	
SICC-U2828B	SICC-U2828G	1 7/16-18UNEF	28	24, 28	10	25	47	43	
SICC-U3622B	SICC-U3622G	2-18UNS	22	36	10	18	41	37.5	
SICC-U3228B	SICC-U3228G	13/4-18UNS	28	32	10	25	47	43	
SICC-U3628B	SICC-U3628G	2-18UNS	28	36	10	25	47	43	
SICC-U3636B	SICC-U3636G	2-18UNS	36	36	10	32	56	52.2	