


SNC IP67



Black
 Gray

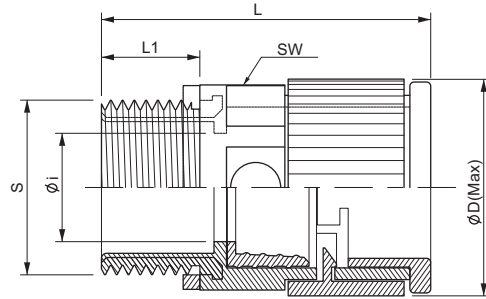

M Pg

- Material: High Quality Polyamide6+Brass Nickel plated
- Protective: IP 67 (EN 60529)
- Temperature Range: -40° C to +105° C
- Short Term: up to +150° C
- Self-Extinguishing: UL94-HB
- Color: Free of Halogen Phosphorous and cadmium
- Application: Black & Gray
- Application: Tramway Vehicle Construction etc.

Pg Thread (DIN 40430)

(dimensions in mm)

Order No.										
Black	Gray	Thread	Fortube size	S	L ₁	L	Ø _i	Ø _D	SW	
SNC-P09B	SNC-P09G	Pg09	10	15.2	13	42	10	25	19.8	
SNC-P11B	SNC-P11G	Pg11	12	18.6	13	42	12	25	22.7	
SNC-P132B	SNC-P132G	Pg13.5	12	20.4	13	42	12	25	22.7	
SNC-P136B	SNC-P136G	Pg13.5	16	20.4	13	43	14	30	28	
SNC-P16B	SNC-P16G	Pg16	16	22.5	15	43	15	30	28	
SNC-P21B	SNC-P21G	Pg21	22	28.3	15	51	19	41	37.5	
SNC-P29B	SNC-P29G	Pg29	28	37	15	55	26	47	43	
SNC-P36B	SNC-P36G	Pg36	36	47	19	67	33	56	52.2	
SNC-P48B	SNC-P48G	Pg48	48	59.3	21	74	48	68	64.1	

Metric Thread (EN 60423)

SNC-M10B	SNC-M10G	M12 X 1.5	10	12	13	42	7	25	19.8
SNC-M12B	SNC-M12G	M16 X 1.5	12	16	13	42	10	25	22.7
SNC-M16B	SNC-M16G	M20 X 1.5	16	20	13	43	14	30	28
SNC-M22B	SNC-M22G	M25 X 1.5	22	25	15	51	16	41	37.5
SNC-M28B	SNC-M28G	M32 X 1.5	28	32	15	55	23	47	43
SNC-M36B	SNC-M36G	M40 X 1.5	36	40	19	67	31	56	52.2
SNC-M48B	SNC-M48G	M50 X 1.5	48	50	21	74	40	68	64.1