


SNC

Straight Fittings

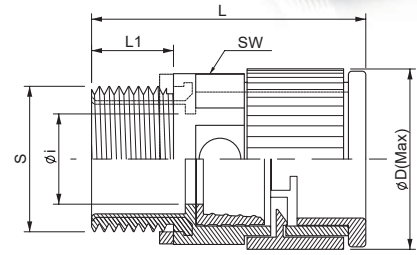

(Unit : mm)


Specifications

Material	High Quality Polyamide 6 + Brass Nickel plated	Degrees of Protection	IP 67 (EN 60529)
The max. Instantaneous Temperature	-40 °C to +105°C	Short Term	up to +150° C
Self-Extinguishing	UL94-HB / Free of Halogen Phosphorous and cadmium	Color	Black & Gray
Application	Tramway Vehicle Construction etc.		

	Ordering No.		Thread	Tube Size	S	L1	L	Øi	ØD	SW
	Black	Gray								
PF Thread (JIS B0202)	SNC-P09B	SNC-P09G	Pg09	10	15.2	13	42	10	25	19.8
	SNC-P11B	SNC-P11G	Pg11	12	18.6	13	42	12	25	22.7
	SNC-P132B	SNC-P132G	Pg13.5	12	20.4	13	42	12	25	22.7
	SNC-P136B	SNC-P136G	Pg13.5	16	20.4	13	43	14	30	28.0
	SNC-P16B	SNC-P16G	Pg16	16	22.5	15	43	15	30	28.0
	SNC-P21B	SNC-P21G	Pg21	22	28.3	15	51	19	41	37.5
	SNC-P29B	SNC-P29G	Pg29	28	37.0	15	55	26	47	43.0
	SNC-P36B	SNC-P36G	Pg36	36	47.0	19	67	33	56	52.2
	SNC-P48B	SNC-P48G	Pg48	48	59.3	21	74	48	68	64.1
	Metric Thread (EN 60423)	SNC-M10B	SNC-M10G	M12 X 1.5	10	12	13	42	7	25
SNC-M12B		SNC-M12G	M16 X 1.5	12	16	13	42	10	25	22.7
SNC-M16B		SNC-M16G	M20 X 1.5	16	20	13	43	14	30	28.0
SNC-M22B		SNC-M22G	M25 X 1.5	22	25	15	51	16	41	37.5
SNC-M28B		SNC-M28G	M32 X 1.5	28	32	15	55	23	47	43.0
SNC-M36B		SNC-M36G	M40 X 1.5	36	40	19	67	31	56	52.2
SNC-M48B		SNC-M48G	M50 X 1.5	48	50	21	74	40	68	64.1

SNIC

Straight Fittings

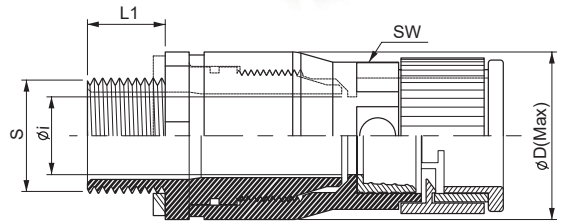

(Unit : mm)

Specifications

Material	High Quality Polyamide 6 + Brass Nickel plated	Degrees of Protection	IP 67 (EN 60529)
The max. Instantaneous Temperature	-40 °C to +105°C	Short Term	up to +150° C
Self-Extinguishing	UL94-HB / Free of Halogen Phosphorous and cadmium	Color	Black & Gray
Application	Tramway Vehicle Construction. Protection from electrical signals and electromagnetic waves.		

	Ordering No.		Thread	Tube Size	S	L1	Øi	ØD	SW	
	Black	Gray								
Pg Thread (DIN 40430)	SNIC-P09B	SNIC-P09G	Pg09	10	15.2	13	10	25	19.8	
	SNIC-P11B	SNIC-P11G	Pg11	12	18.6	13	12	25	22.7	
	SNIC-P136B	SNIC-P136G	Pg13.5	16	20.4	13	14	30	28.0	
	SNIC-P16B	SNIC-P16G	Pg16	16	22.5	13	15	30	28.0	
	SNIC-P21B	SNIC-P21G	Pg21	22	28.3	15	19	41	37.5	
	SNIC-P29B	SNIC-P29G	Pg29	28	37.0	15	26	47	43.0	
	SNIC-P36B	SNIC-P36G	Pg36	36	47.0	17	33	56	52.2	
	SNIC-P48B	SNIC-P48G	Pg48	48	59.3	17	48	68	64.1	
	Metric Thread (EN 60423)	SNIC-M10B	SNIC-M10G	M12 X 1.5	10	12	13	7	25	19.8
		SNIC-M12B	SNIC-M12G	M16 X 1.5	12	16	13	10	25	22.7
SNIC-M16B		SNIC-M16G	M20 X 1.5	16	20	13	14	30	28.0	
SNIC-M22B		SNIC-M22G	M25 X 1.5	22	25	15	16	41	37.5	
SNIC-M28B		SNIC-M28G	M32 X 1.5	28	32	15	23	47	43.0	
SNIC-M36B		SNIC-M36G	M40 X 1.5	36	40	17	31	56	52.2	
SNIC-M48B		SNIC-M48G	M50 X 1.5	48	50	17	40	68	64.1	