

B2NB Series


Ø22/25mm LED Illuminated Buzzer



Dimensions



B2NB-B1D

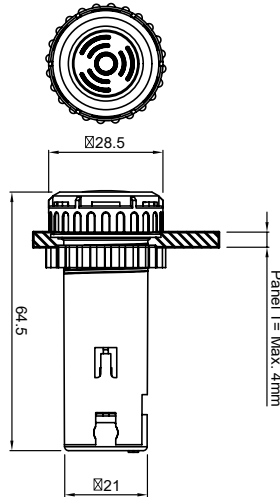

- Improved visibility with high luminance LED
- Magnetic buzzer with clear & loud bass sound

Ordering Information

B2NB- 1D- R

①

① LED Color	no mark	Green
	R	Red

Specifications




Rated voltage/current	12-14VDC / 60mA	
Protection	IP30	
Sound level	0.1m	85dB
	1.0m	75dB
Sound mode	Intermittent / Continuous	
Operation Frequency	Max 30 times/min	
Vibration	10-55Hz, 3mm	
Operation temperature	-10°C ~ +55°C	
Operating Humidity	35~85%RH	
Storage Temperature	-20°C ~ +65°	
Recommended wire	Copper wire 14-16 AWG	
Weight	Approx. 18g	

KPL Series

Ø22/25mm LED Illuminated Buzzer



Dimensions

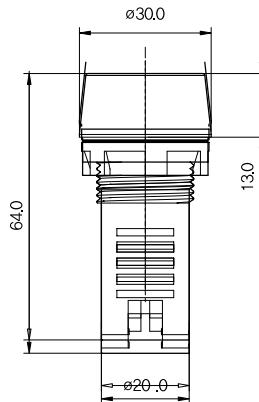

Ordering Information

KPL- BZ I R 12V

①

②

③

① Sound	I	Interrupted
	C	Continuous

② Color	R	Red
	G	Green

③ Voltage	AC/DC	12V
		24V
	AC	110V
		220V

Specifications

Power Consumption	20mA
Insulation Resistance	100MΩ at 500VDC
Lamp Life	50,000 hrs
Type of Sounds	Interrupted/Continued
Sound Level	80dB
Weight	Approx. 24g
Ambient Temp.	-25°C ~ +55°C (No Freezing)
Terminal bolt driving torque	0.8N·m (8.16kgf·cm)
Recommended wire	Copper wire 14-16 AWG