


Cable Glands

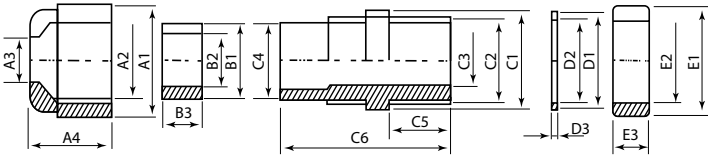

NPT Series Specifications

Material	PL (Nylon), UL94
Working Temperature	-40°C to 100°C (-40°F to 212°F) in static state instantaneous heat resistance up to 120°C -20°C to 80°C (-4°F to 176°F) in dynamic state - Instantaneous heat resistance up to 100°C
Hermetic Seal	NBR

Part Numbers and Size

SIZE CABLE Ømm	MODEL	
	Beige	Black
3.5 ~ 6	BC-PG-7 -G	BC-PG-7 -B
4 ~ 8	BC-PG-9 -G	BC-PG-9 -B
5 ~ 10	BC-PG-11 -G	BC-PG-11 -B
6 ~ 12	BC-PG-13.5 -G	BC-PG-13.5 -B
10 ~ 14	BC-PG-16 -G	BC-PG-16 -B
12 ~ 15	BC-PG-19 -G	BC-PG-19 -B
13 ~ 18	BC-PG-21 -G	BC-PG-21 -B
15 ~ 19	BC-PG-25 -G	BC-PG-25 -B
18 ~ 25	BC-PG-29 -G	BC-PG-29 -B
22 ~ 32	BC-PG-36 -G	BC-PG-36 -B
30 ~ 38	BC-PG-42 -G	BC-PG-42 -B
34 ~ 44	BC-PG-48 -G	BC-PG-48 -B
42 ~ 50	BC-PG-63 -G	BC-PG-63 -B

Dimensions

Unit: mm

Part Number	Ømm (cable)	A1	A2	A3	A4	B1	B2	B3	C1	C2	C3	C4	C5	C6	D1	D2	D3	E1	E2	E3
BC-PG-7	3.5~6	17	12.5	7	15.5	8	6	7.5	17.5	12	8	8.5	8	29	17	11	1.5	19.5	12	5
BC-PG-9	4~8	20.5	15.5	8.5	15	10.5	8	8.5	21	16	11	10.5	8	31.5	21	15.5	1.5	24	15.5	5
BC-PG-11	5~10	24	18.5	10.5	16.5	13.5	9.5	8.5	24	18	14	14	8	33	24	18	1.5	26	18	5
BC-PG-13.5	6~12	26.5	20.5	12.5	18.5	15.5	11.5	7.5	26	20	16	16	9	33.5	26	20	1.5	29	21.5	5.5
BC-PG-16	10~14	29.5	22.5	14	18	17	13	9	29.5	22	17.5	18	10	36	29.5	21.5	1.5	32.5	22.5	6
BC-PG-19	12~15	30	24.5	16	20	18	15	8.5	30	23.5	18.5	18.5	10	37	30	23	1.5	33	24.5	6
BC-PG-21	13~18	36	29.5	18	23	21	17	10.5	36	28	22	22.5	10	41	36	27.5	1.5	39	27.5	6.5
BC-PG-25	15~19	39	31	20.5	21	23	19	11	39	29.5	24	24	11	41	39	28.5	1.5	40	30	7
BC-PG-29	18~25	45.5	37	25	25.5	29.5	24.5	14	45	36.5	30.5	30.5	12	46.5	45	36	1.5	49.5	37	7.2
BC-PG-36	22~32	59	48.5	32	29.5	39	32.5	16	57.5	46.5	39.5	39.5	13.5	55	57.5	45	1.5	64.5	47	7.5
BC-PG-42	30~38	67.5	56	38	30	46.5	39	16.5	66	53.5	47.5	45.5	14.5	56.5	66	52.5	2	69	54	7.9
BC-PG-48	34~44	72	60.5	43.5	29.5	50	44	16.5	70.5	58.5	52	51	14	56.5	69.5	57.5	2	76	59	7.9
BC-PG-63	42~50	76	67.2	49.7	39.8	60	53.3	18.8	76.5	70	61	58	27	77	70	65	3	81	68	9.2

Bend Proof Cable Glands

Part Numbers and Size

Unit: mm

Part number	Cable Range	Screw width(A)	Mounting Hole
BC-BP-PG 7	3 ~ 5.5	12.5	12.5 ~ 12.8
BC-BP-PG 9	8 ~ 4.5	15.2	15.2 ~ 15.5
BC-BP-PG 11	6 ~ 10	18.6	18.6 ~ 18.9
BC-BP-PG 13.5	7 ~ 12.5	20.4	20.4 ~ 20.7
BC-BP-PG 16	8.5 ~ 14	22.5	22.5 ~ 22.8
BC-BP-PG 21	12.5 ~ 18	28.3	28.3 ~ 28.7

