

Ordering Information

Adjustable volume •
3 Melody & 3 Siren Modes •

MW86N - 00 - M3 B
① ② ③

| | | |
|-----------------|----------------|------------------|
| ① Power | 00 | 12 ~ 24VDC |
| | FF | 90 ~ 240VAC |
| ② Sound Type | M3 (melody) | Fur Elise |
| | | Home, Sweet home |
| | | The Cuckoo Waltz |
| | S3 (Siren) | Fire truck |
| | | Police car |
| ③ Body color | | Ivory |
| | B | Black |
| | R | Red |

Specifications

| | | |
|------------------------|----------------|----------------------|
| Model | MW86N | |
| Power Supply | 12 ~ 24VDC | 90 ~ 240VAC(50~60Hz) |
| Current Consumption | Max 0.20A ±10% | Max 0.06A ±10% |
| Alarm Sound Level | Standard Type | 55 ~ 85±5dB |
| | Horn Type | 55 ~ 90±5dB |
| Material | ABS | |
| Ambient Temperature | -20~40°C | |
| Storage Temperature | -20~70°C | |
| Ambient Humidity | 45~85% RH | |
| Degree of Protection | Standard Type | IP43 |
| | Horn Type | IP54 |
| Recommended Wire Size | UL1007/22AWG | |
| Weight | Standard Type | Approx. 189g |
| | Horn Type | Approx. 244g |
| Certificate/Compliance | RoHS | |

MW86N Series

Ø86mm Wall Mounting Signal Horn




Standard Type




Horn Type

Dimensions

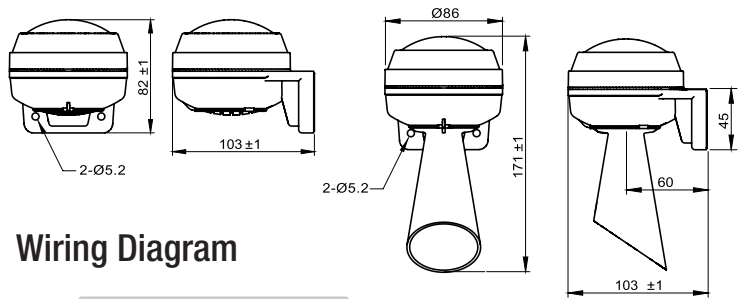


Wiring Diagram


Melody Type / 12~24VAC/DC 90~240VAC

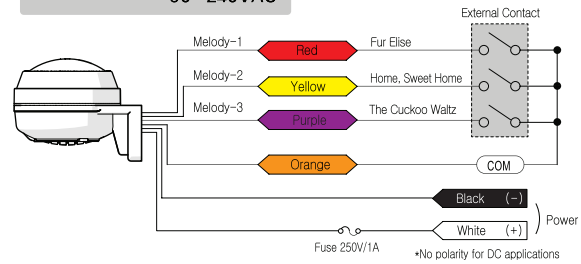


Siren Type / 12~24VAC/DC 90~240VAC

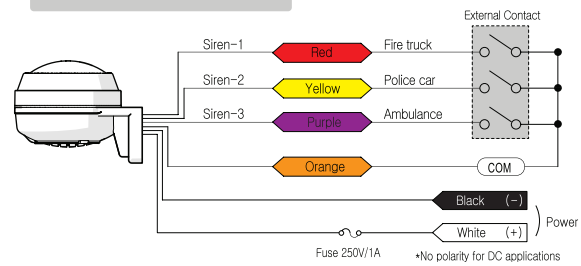

Volume Control

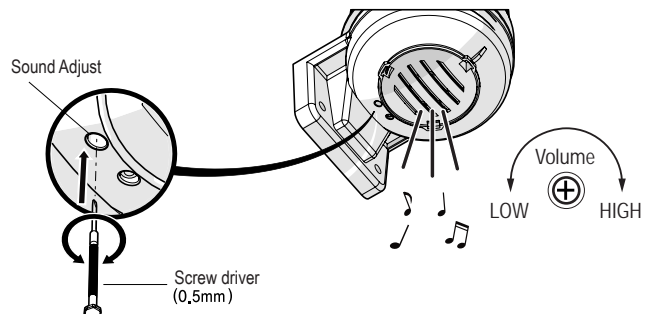

Installation guide

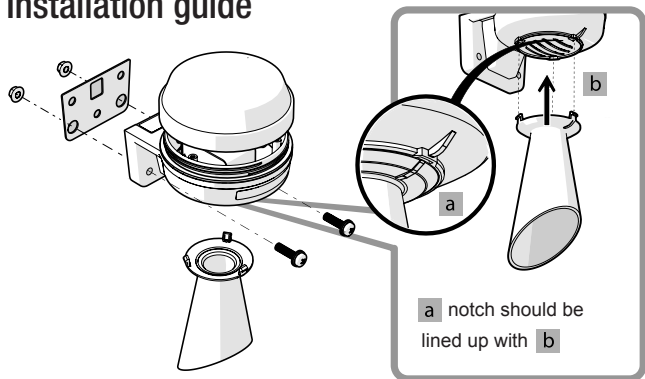

Installation panel drawing

