

## **ATEPR/ATESR Series**

Ready to Use Andon Lights With Remote Control Box

- 56mm diameter LED Andon lights
- Pre-wired suitable for multiple applications
- 1-5 stacks, or 1-4 stacks with buzzer
- 80dB buzzer or adjustable 10-100dB buzzer
- Wall mountable with L bracket
- 9.45" pole & 6ft power cord

### **Ordering Information**

ATE PR - 10 - R - B

(1)	PR	Pushbutton		
Switch Type	SR Selector Switch (2 Position			
2	10	10 feet		
Remote Cable Length	15	15 feet		
③ Lens Colors	R	Red		
	Y	Yellow		
	G	Green		
	RY	Red, Yellow		
	RG	Red, Green		
	RYG	Red, Yellow, Green		
	RYGB	Red, Yellow, Green, Blue		
	RYGBC*	Red, Yellow, Green, Blue, Clear		
④ Buzzer Type (optional)	no mark	No Buzzer		
	В	80dB Buzzer		
	Z	10-100dB Buzzer		

marked type is not available for buzzer option

# Red Flashing, Other Lights Steady \* 90~240V AC 50/60 Hz (±10%) Red, Yellow, Green, Blue & Clear Pushbutton or Selector Switch 9.45"(optional: 29.53", 39.37")

### **LED Modules**

**Specifications** 

Operation/Function

Power Supply

Lens Diameter

**Switching Options** 

**Ambient Temperature** 

Storage Temperature **Ambient Humidity** 

Lens Color

Flash Rate

Pole length

Power Cord

Vibration

Color	Red	Yellow	Green	Blue	Clear
Current Consumption	17mA	17mA	22mA	22mA	22mA

56 mm (2.2 inch)

80 times/ minute

0.75mm at 10~55Hz -15°C~40°C


-20°C ~ 70°C

45~85% RH

3 prong 6ft, installed

#### **Buzzer Modules**

Туре	В	Z				
Style	Fixed Sound	Adjustable Sound				
Sound Level	80±5dB	10 ~ 100±5dB				
Current Consumption	30mA	150mA				

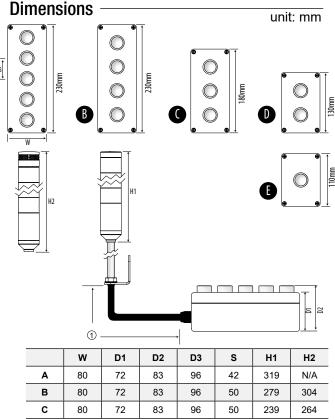

83

83

96

80

72

D

Ε

224

184

199

159

50

N/A

<sup>\*</sup> Steady or Flashing function for any light stack can be changed by custom order